


Flash FL-m

Maximum output - Ear simulator

IEC 60118-0


Output dB SPL

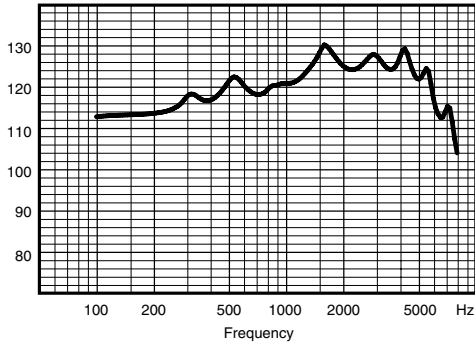

Maximum output - 2cc coupler

IEC 60118-7 / ANSI S3.22 (2003)


Output dB SPL

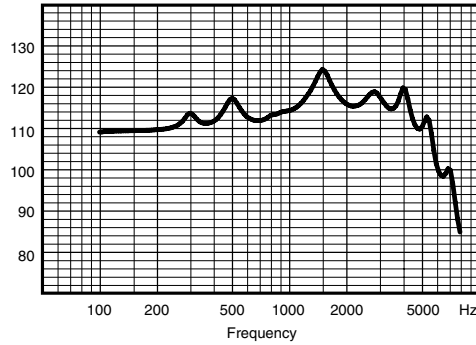

Output - Ear simulator

IEC 60118-0


Output dB SPL

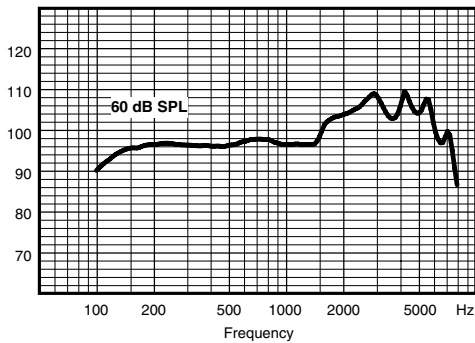

Output - 2cc coupler

IEC 60118-7 / ANSI S3.22 (2003)

Output dB SPL

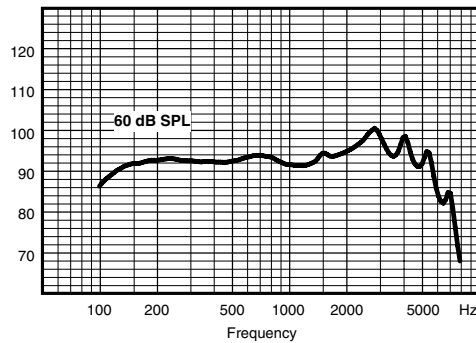

Technical data

Typical data obtained through standard pure tone measurements.
Hearing aid set to linear test mode, unless stated otherwise.

		IEC 60118-0	ANSI S3.22-2003 / IEC 60118-7
OSPL90	2500 Hz	125 dB SPL	117 dB SPL
	Peak	130 dB SPL	124 dB SPL
	Average	123 dB SPL	118 dB SPL
Acoustic output (Input 60 dB SPL)	2500 Hz	107 dB SPL	98 dB SPL
	Peak	110 dB SPL	101 dB SPL
	Average	99 dB SPL	95 dB SPL
Max gain (fixed max gain setting)	2500 Hz	64 dB	55 dB
	Peak	64 dB	56 dB
	Average	56 dB	51 dB
Frequency range		100 Hz - 8200 Hz	100 Hz - 7600 Hz
Harmonic distortion (Input 70 dB SPL)	500 Hz	1%	1%
	800 Hz	2.1%	2%
	1600 Hz	0.1%	0.1%
Equivalent input noise		23 dB SPL	26 dB SPL
Battery drain (stand by)		0.7 mA	0.7 mA
Battery drain		0.7 mA	0.7 mA
Battery life / hours (Type 10 Zn-Air, 90 mAh)		130 (>100)	125 (>100)
Mobile phone immunity		IRIL: -21/-11 dB SPL	U-rating: M4

